
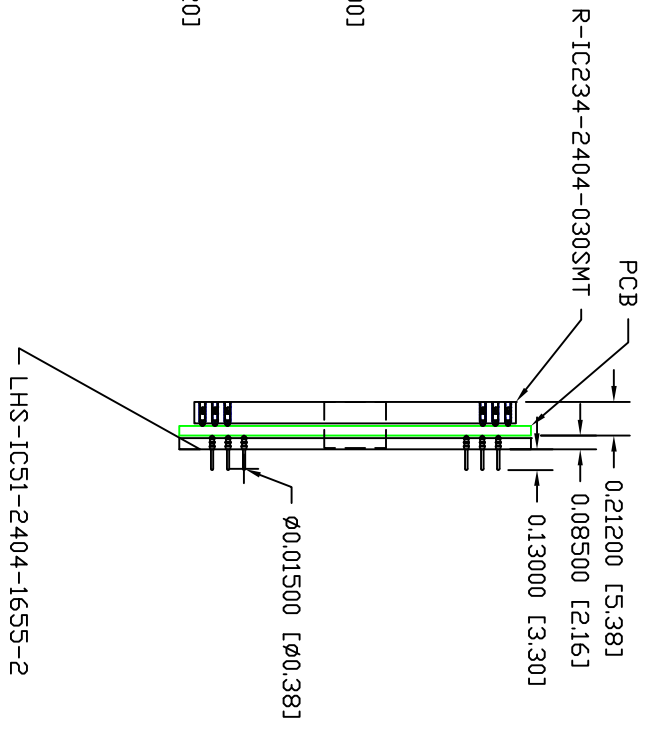


PHI SPECIFICATIONS:
 MATERIAL: STAINLESS STEEL
 FINISH: BRASS ALLOY 360 1/2 HARD PER QQ-B-628
 10u GOLD OVER 100u NICKEL MIL-G-45204
 ELECTRICAL: MIL-S-13849/24-GF/REFILL: 94V-0, CONTINUOUS USE TEMP: 150C, HEAT DEFLECTION TEMP(@264 PSI)175C
 CURRENT: 1 AMP

REVISIONS			DATE	APPROVED
ZONE	REV	DESCRIPTION		
---	A	NEW RELEASE	01/12/06	

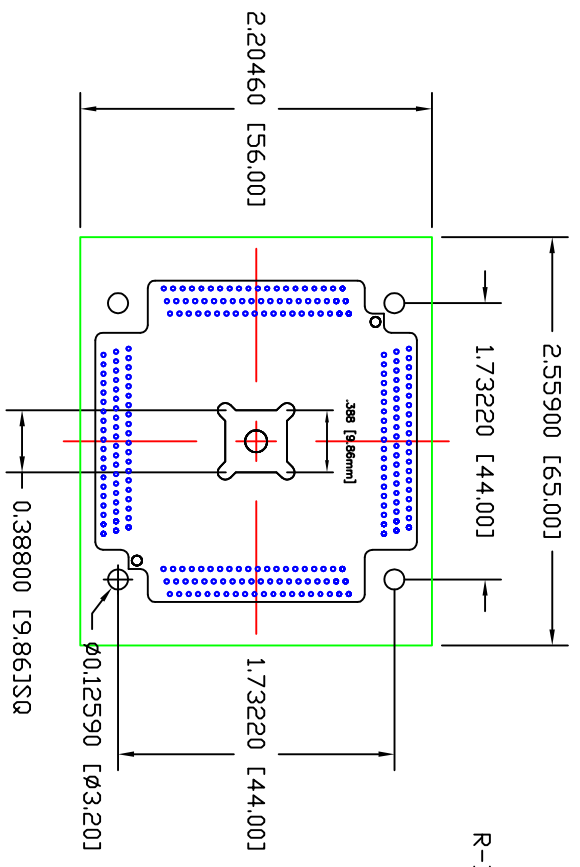

- Notes:**
1. R-IC234-2404-030SMT SOLDER SMT DN TDP DF PCB.
 2. LHS-IC51-2404-1655-2 SOLDER SMT DN BOTTOM DF PCB.

CONTRACT NO.		ADAPTERS-PLUS WWW.ADAPT-PLUS.COM, PH 209-839-0200	
APPROVALS:		SOCKET CONVERSION ADAPTERS	
DRAWN BY: ANDREW MONTOYA		IC234-2404-030 TO IC51-2404-1655-2	
CHECKED BY: MIKE OIDEM		SIZE A	REV A
ISSUED BY: ANDREW MONTOYA		FSQM NO.	DWG NO. CA-IC2342404-IC51
SCALE: 1:1		DATE: 01/12/06	SHEET: 1 OF 1