

PIN SPECIFICATIONS:


MATERIAL:
BRASS ALLOY 360 1/2 HARD PER QQ-B-626
FINISH:
10u GOLD OVER 100u NICKEL MIL-G-45204
ELECTRICAL:
RESISTANCE: <25 M OHM

MATERIAL SPECIFICATIONS:


STANDARD MATERIAL:
GLASS EPOXY FR-4, IPC-4101/24,
MIL-S-13949/04-GF/GFGUL:
94V-0, CONTINUOUS USE TEMP 150C,
HEAT DEFLECTION TEMP(@264 PSI)175C

REVISIONS


ZONE	REV	DESCRIPTION	DATE	APPROVED
---	1	PRELIMINARY	01/25/06	

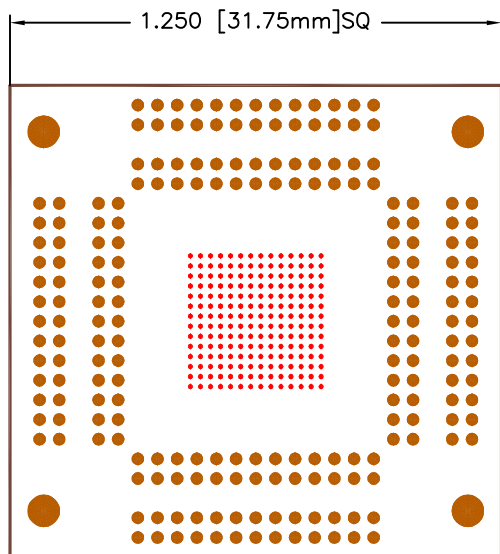

ITEM 1 TOP VIEW

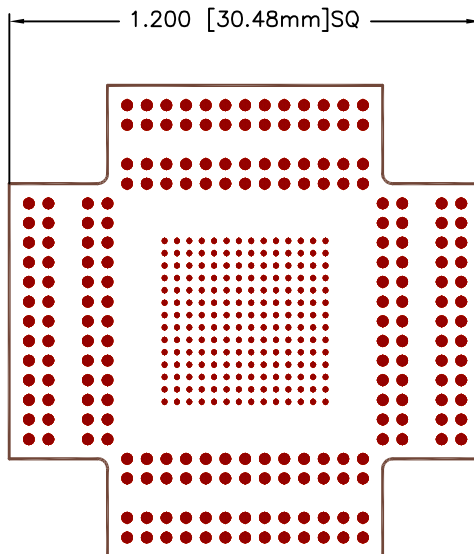

ITEM 2 BOTTOM VIEW

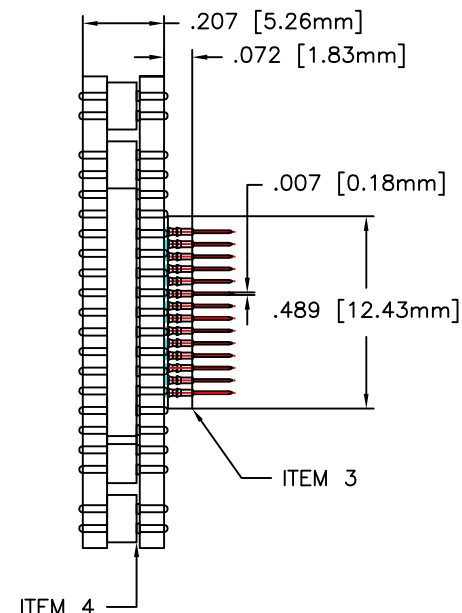


NOTES:

ITEM 3 SOLDERS TO BOTTOM OF ITEM 2
ITEM 2 AND ITEM 1 SOLDER TOGETHER.
CONTACT SOCKET TB196SC-SA

B.O.M.

PART NUMBER	QTY
1) 196.65.8TOP	1
2) 196.65.8BOT	1
3) LHS196-1413F	1
4) 852-10-026-001	8

CONTRACT NO.		 ADAPTERS-PLUS WWW.ADAPT-PLUS.COM, PH 209-839-0200		
APPROVALS:		CUSTOM ADAPTER FOR 196 BGA .65MM CONVERTS TO .8MM PITCH		
DRAWN BY: ANDREW MONTOYA				
CHECKED: MIKE OIDEM	SIZE A	FSCM NO.	DWG NO. CA0196.65-196.8	REV 1
ISSUED: ANDREW MONTOYA	SCALE: 2:1	DATE : 01/25/06	SHEET: 1 OF 1	