

PIN SPECIFICATIONS:

MATERIAL:
BRASS ALLOY 360 1/2 HARD PER QQ-B-626

FINISH:
10u GOLD OVER 100u NICKEL MIL-G-45204


ELECTRICAL:
INDUCTANCE: <1NH
SELF INDUCTANCE: <.3NH
GROUND CAPACITANCE: <.08PF
CURRENT: 1 AMP
RESISTANCE: <25 M OHM


MATERIAL SPECIFICATIONS:

STANDARD MATERIAL:
GLASS EPOXY FR-4, IPC-4101/24,
MIL-S-13949/04-GF/GFGUL:
94V-0, CONTINUOUS USE TEMP 150C,
HEAT DEFLECTION TEMP(@264 PSI)175C

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
---	A	NEW DRAWING	10/28/04	

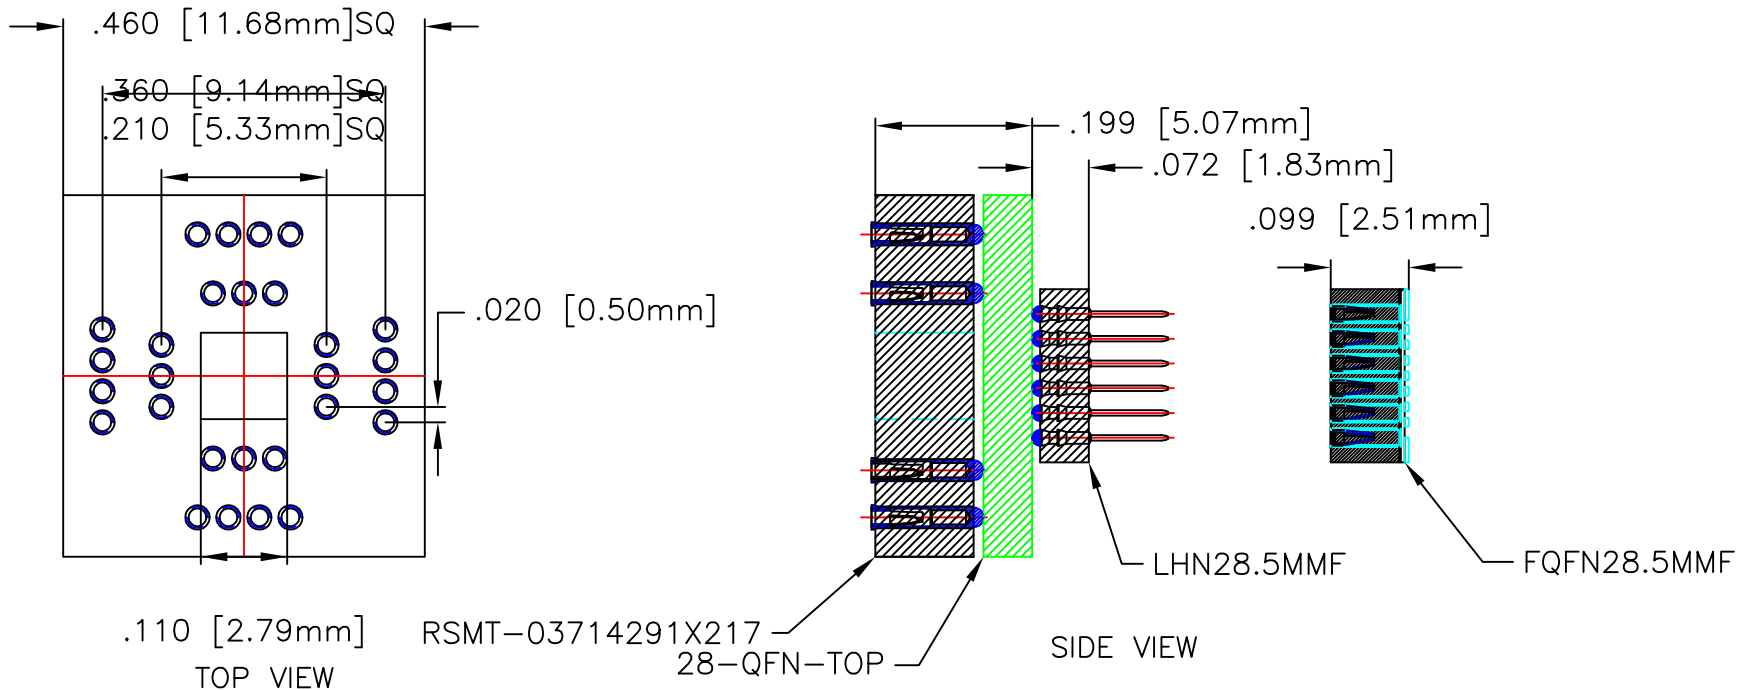

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE : FRACTIONS DECIMALS ANGLES +/- .1 .XX +/- .01 +/- .1° .XXX +/- .005	CONTRACT NO.	 ADAPTERS-PLUS WWW.ADAPT-PLUS.COM, PH 209-839-0200			
	APPROVALS:				28 QFN Loranger SOCKET TO QFN LAND PADS
MATERIAL: SEE NOTES	DRAWN BY: ANDREW MONTOYA	SIZE A	FSCM NO.	DWG NO. CA028QFN-SMT.5MMF	REV A
FINISH: SEE NOTES	CHECKED: MIKE OIDEM			SCALE: 4:1	DATE : 10/28/04
DO NOT SCALE DRAWING	ISSUED: ANDREW MONTOYA				