




PIN SPECIFICATIONS:

MATERIAL:
BRASS ALLOY 360 1/2 HARD PER QQ-B-626
FINISH:
10u GOLD OVER 100u NICKEL MIL-G-45204
ELECTRICAL:
RESISTANCE: <25 M OHM

MATERIAL SPECIFICATIONS:

STANDARD MATERIAL:
GLASS EPOXY FR-4, IPC-4101/24,
MIL-S-13949/04-GF/GFGUL:
94V-0, CONTINUOUS USE TEMP 150C,
HEAT DEFLECTION TEMP(@264 PSI)175C
SOLDER BALL:
020Ø Sn 96.5/Ag3.0/Cu.5 solder
Melting Temperature 218.5°C


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
---	1	PRELIMINARY	11/11/05	

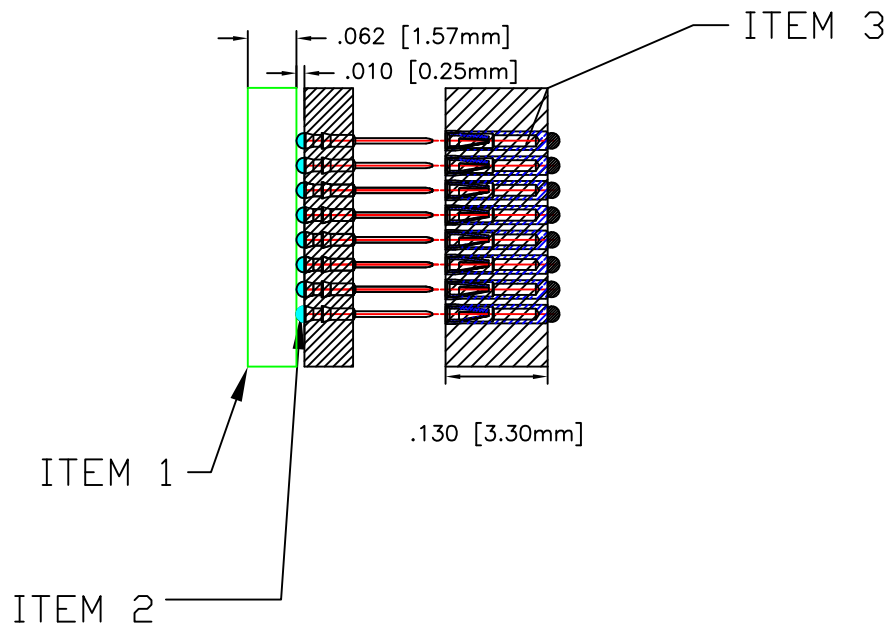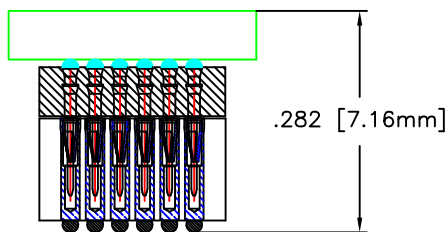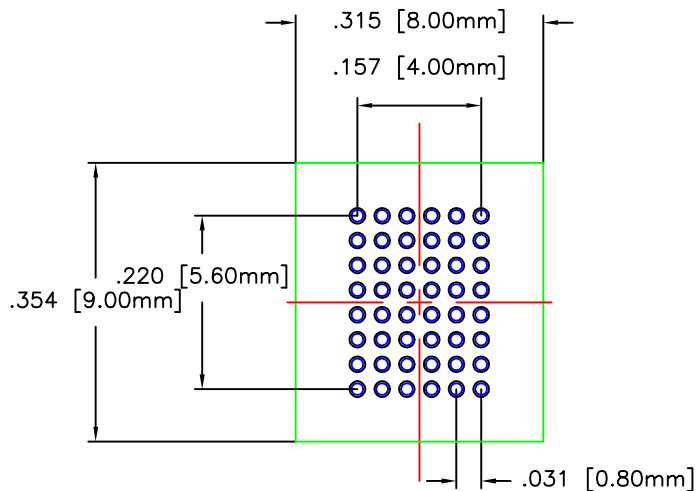

NOTES:

B3 on component side to C2 on bottom side.
ITEM 3 SOLDERS INPLACE OF COMPONENT
ON MOTHER BOARD. COMPONENT SOLDERS
TO TOP SIDE OF ITEM 1.

B.O.M.	PART NUMBER	QTY
1)	48-0813-HW	1
2)	LHS048-0813F	1
3)	FBS048S0813F	1

CONTRACT NO.		 ADAPTERS-PLUS WWW.ADAPT-PLUS.COM, PH 209-839-0200		
APPROVALS:		CUSTOM ADAPTER FOR 48 POS BGA 6X8 ARRAY 0.80MM FOR HONEYWELL		
DRAWN BY: ANDREW MONTOYA				
CHECKED: MIKE OIDEM	SIZE A	FSCM NO.	DWG NO. CA048-0613-HW	REV 1
ISSUED: ANDREW MONTOYA	SCALE: 4:1	DATE : 11/11/05	SHEET: 1 OF 1	