


**PIN SPECIFICATIONS:**

**MATERIAL:**  
BRASS ALLOY 360 1/2 HARD PER QQ-B-626  
**FINISH:**  
10u GOLD OVER 100u NICKEL MIL-G-45204  
**ELECTRICAL:**  
CURRENT: 1 AMP  
RESISTANCE: <25 M OHM



**MATERIAL SPECIFICATIONS:**

**STANDARD MATERIAL:**  
GLASS EPOXY FR-4, IPC-4101/24,  
MIL-S-13949/04-GF/GFGUL:  
94V-0, CONTINUOUS USE TEMP 150C,  
HEAT DEFLECTION TEMP(@264 PSI)175C

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
---	1	PRELIMINARY	03/21/06	

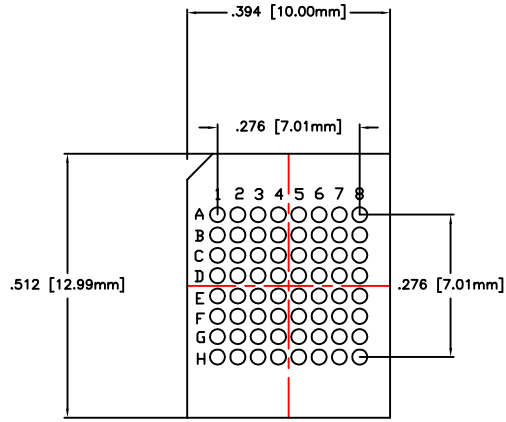

TOP VIEW

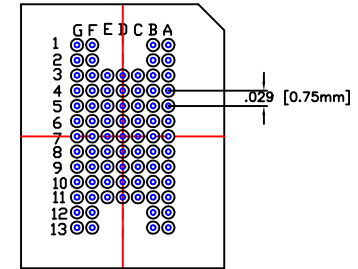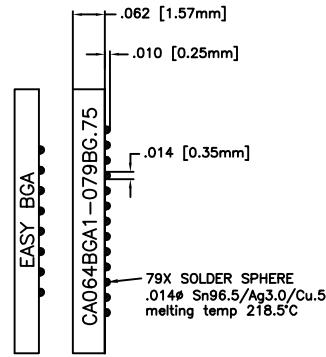

BOTTOM VIEW

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS PROPERTY OF ADAPTERS-PLUS INC. IT MAY NOT BE ISSUED FOR MANUFACTURE OR SALE, REPRODUCED, TRANSMITTED OR OTHERWISE DISCLOSED TO ANY OTHER PARTY WITHOUT THE EXPRESSED WRITTEN CONSENT FROM ADAPTERS-PLUS INC.



ADAPTERS-PLUS  
WWW.ADAPT-PLUS.COM, PH 209-839-0200

CUSTOM ADAPTER TO CONVERT 1.00MM  
BGA TO .75MM PITCH BGA

<b>DRAWN BY:</b> ANDREW MONTOYA	<b>SIZE</b>	<b>FSCM NO.</b>	<b>DWG NO.</b> CA064BGA1-079BG.75	<b>REV</b> 1
<b>CHECKED:</b> MIKE OIDEM	<b>SCALE</b> 2:1	<b>DATE</b> 03/21/06	<b>SHEET</b>	