
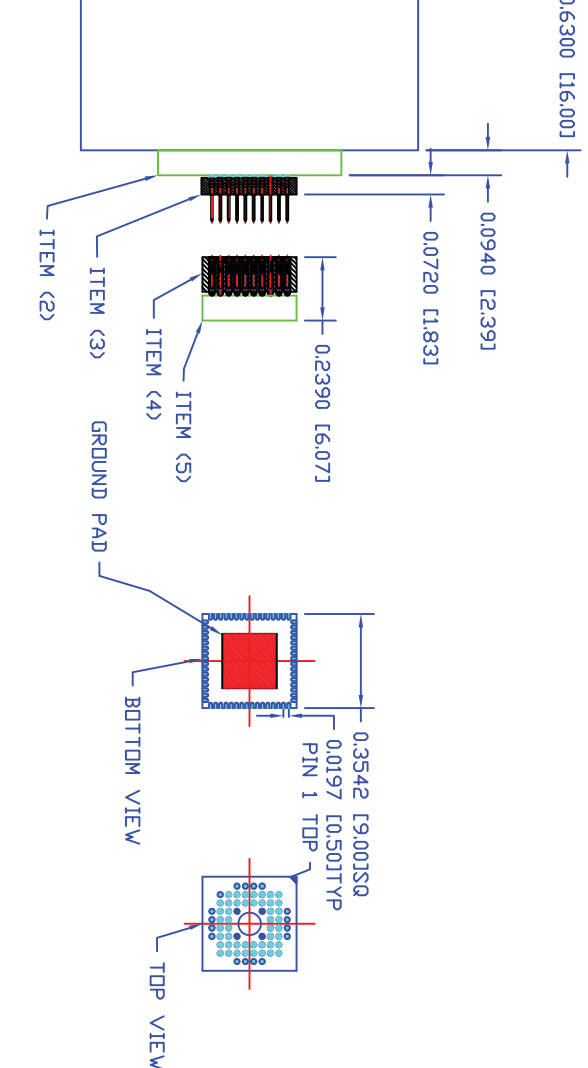


PIN SPECIFICATIONS:
 MATERIAL: BRASS ALLOY 360 1/2 HARD PER QQ-B-626
 FINISH: GOLD OVER 100U NICKEL MIL-G-45204
 ELECTRICAL: CURRENT: 1 AMP RESISTANCE: <25 M OHM

MATERIAL SPECIFICATIONS:
 STANDARD MATERIAL: GLASS EPOXY FR-4, IPC-4101/24,
 MIL-S-13884 (REV. 1/85) SOLDER: 60/40 (60% Sn, 40% Pb) 150C.
 HEAT DEFLECTION TEMP.(@264 PSI)75C

BO.M.	PART NUMBER	QTY	DESCRIPTION(1)
1)	64QFN1000	1	TOP VIEW
2)	64QFN1000	1	SOCKET
3)	US08S-1009F	1	SMT HEADER
4)	RES08S1009F	1	FSMALE SMT
5)	64QFNLS-80T	1	BOTTOM PCB

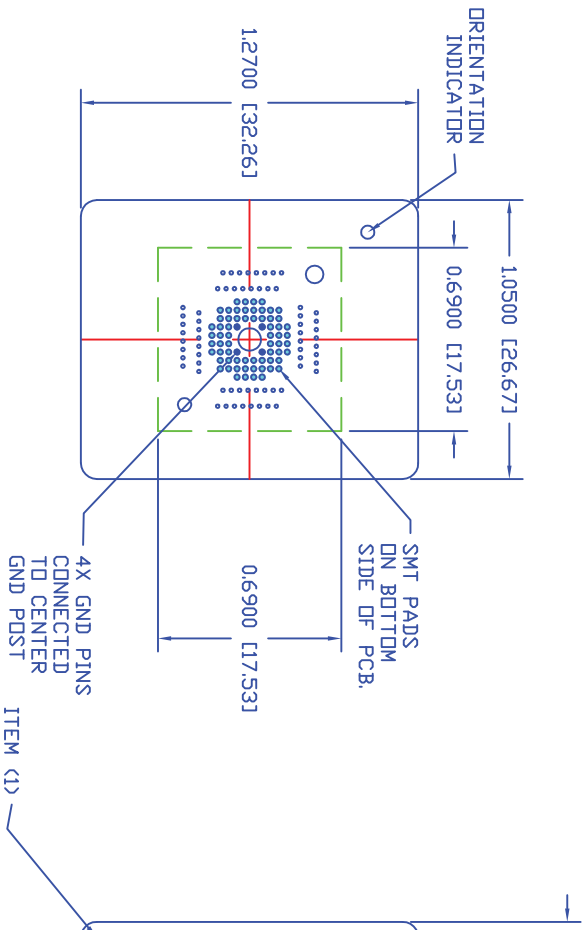

PROPRIETARY INFORMATION.

NOTES:
 (UNLESS OTHERWISE SPECIFIED)
 1: ALL ROUNDS ARE R.020 [R0.51mm]
 2: ALL FILLETS ARE R.031 [R0.79mm]
 3: ALL CHAMFERS ARE .050 [1.27] X 45
 4: LOCKING COVER ROUNDS ARE R.100 [R2.54mm]
 5: ALL VIEWS SHOWN AS TOP VIEW

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE :
 FRACTIONS DECIMALS ANGLES
 +/- .1 .XXX +/- .005 +/- .1

CONTRACT NO.	DRAWN BY:
APPROVALS:	CHECKED:
ISSUED: ANDREW MONTOYA	MIKE OIDEM

ADAPTERS-PLUS WWW.ADAPT-PLUS.COM, PH 209-839-0200	FOR 64 QFN SOCKET ADAPTER
SIZE A	FSQM NO.
SCALE: 2:1	DWG NO. CA064QFN-SMT.5MMF
DATE: 08/09/05	REV A
SHEET: 1 OF 1	