


MATERIAL SPECIFICATIONS:
 MATERIAL: BRASS ALLOY 360 1/2 HARD PER QQ-B-628
 FINISH: POLISHED
 ELECTRICAL PERFORMANCE TESTS: MIL-STD-202 OR 1314 METHODS:
 MAX VOLTAGE: 90 VDC/65 VDC
 MAX CURRENT: 1 AMP/0.01 AMP/700C
 INSULATION RESISTANCE: 9500 VDC/5000 MEGOHMS MIN.
 OPERATING TEMPERATURE: 25H MAX.
 SELF-INDUCTANCE: 25H MAX.


MATERIAL SPECIFICATIONS:
 STANDARD MATERIAL:
 GLASS EPOXY FR-4, PC-4101/24,
 94V-0, CONTINUOUS USE TEMP 130C,
 HENT DEFLECTION TEMP(62% FS)175C

B.O.L.T	PART NUMBER	QTY	DESCRIPTION
1)	208QFP-PRDR_RCP1	1	FCB
2)	US208-50MM	1	LCB INTERPOSER
3)	FS208-50MM	1	QFP SMT FCB SOCKET



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
---	A	NEW RELEASE	11/30/06	

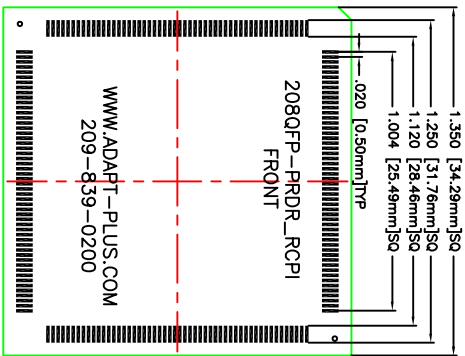


TOP VIEW

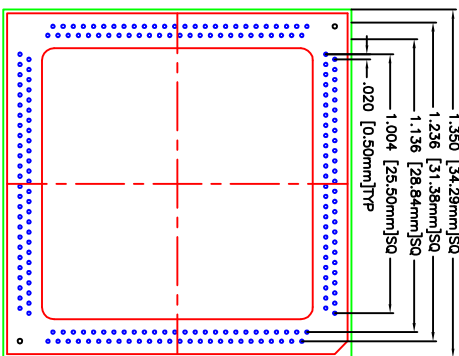

BOTTOM VIEW

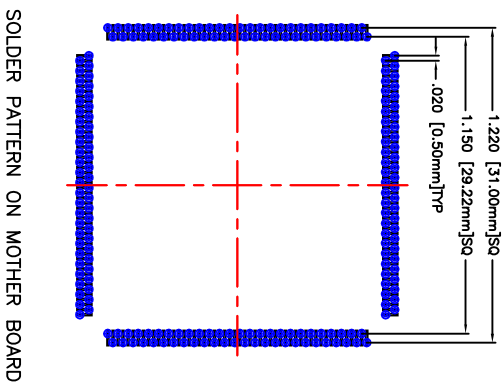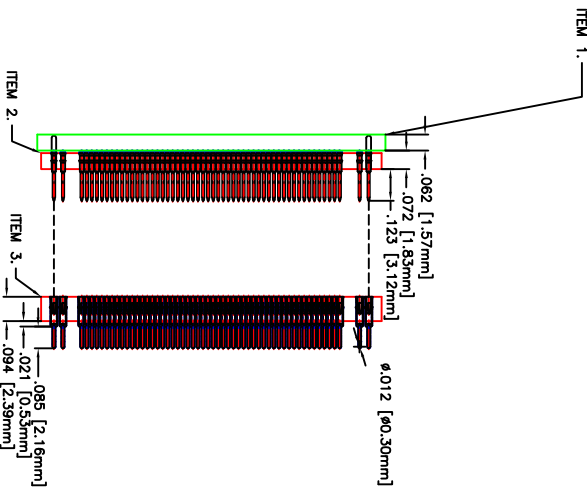

SOLDER PATTERN ON MOTHER BOARD

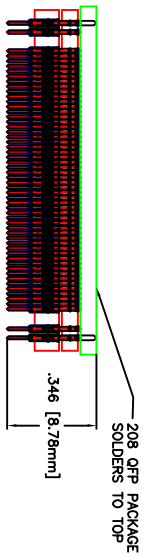

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS PROPERTY OF ADAPT-PLUS, INC. IT MAY NOT BE REPRODUCED, TRANSMITTED OR OTHERWISE DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN CONSENT OF ADAPT-PLUS, INC.



ADAPT-PLUS
 WWW.ADAPT-PLUS.COM, PH 209-839-0200

208 QFP 0.50MM PITCH

CUSTOM ADAPTER FOR LUCENT TECHNOLOGY.

DRAWN BY: ANDREW MONTOYA	SIZE: FSCM NO.	DMG NO. CA208QFP-PRDR_RCP1	REV: A
CHECKED: MIKE OIDEEM	SCALE: 2:1	DATE: 11/30/06	SHEET