
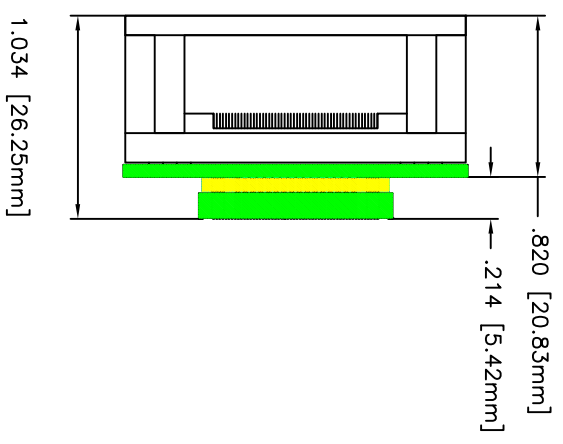
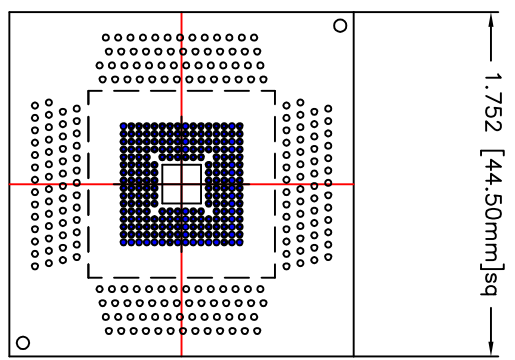


PIN SPECIFICATIONS:
 MATERIAL: BRASS ALLOY 360 1/2 HARD PER QQ-B-626
 FINISH: 10u GOLD OVER 100u NICKEL MIL-G-45204
 ELECTRICAL: CURRENT: 1 AMP
 RESISTANCE: <25 M OHM

MATERIAL SPECIFICATIONS:
 STANDARD MATERIAL: GLASS EPOXY FR-4, IPC-4101/24,
 MIL-S-13949/04-GF/GFGUL
 94V-0, CONTINUOUS USE TEMP 150C,
 HEAT DEFLECTION TEMP(264 PSI)175C

REVISIONS		DESCRIPTION	DATE	APPROVED
1	REV	PRELIMINARY DRAWING	02/14/05	
---	---			



CONTRACT NO.	 ADAPTERS-PLUS WWW.ADAPT-PLUS.COM, PH 209-839-0200			
APPROVALS:				
DRAWN BY: ANDREW MONTOYA	216 QFP SOCKET TO SMT PADS, .4MM			
CHECKED: MIKE OIDEM	SIZE A	FSCM NO.	DWG NO. CA216QFP-SMT.4mmF	REV A
ISSUED: ANDREW MONTOYA	SCALE: 1:1	DATE : 02/14/05	SHEET:	1 OF 1