

MATERIAL SPECIFICATIONS :



STANDARD MATERIAL:
 GLASS EPOXY FR-4, IPC-4101/24,
 MIL-S-13949/04-GF/GFGUL:
 94V-0, CONTINUOUS USE TEMP 140C,
 HEAT DEFLECTION TEMP(@264 PSI)175C


ASSEMBLY INSTRUCTIONS:

COMPONENTS TO BE MACHINE PLACED AND
 RE-FLOWED ON PCB IN PANELS OF 60 PER.

ALL INSPECTIONS MEET IPC REQUIREMENTS.

ZONE	REV			APPROVED
---	A	NEW DRAWING	10/10/04	
---	B	REVISED	04/11/05	

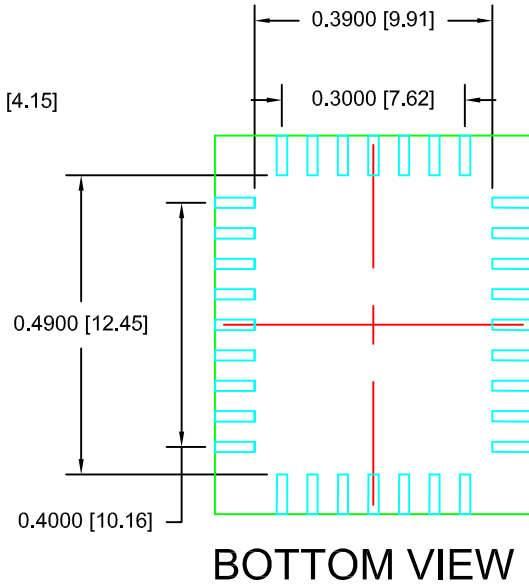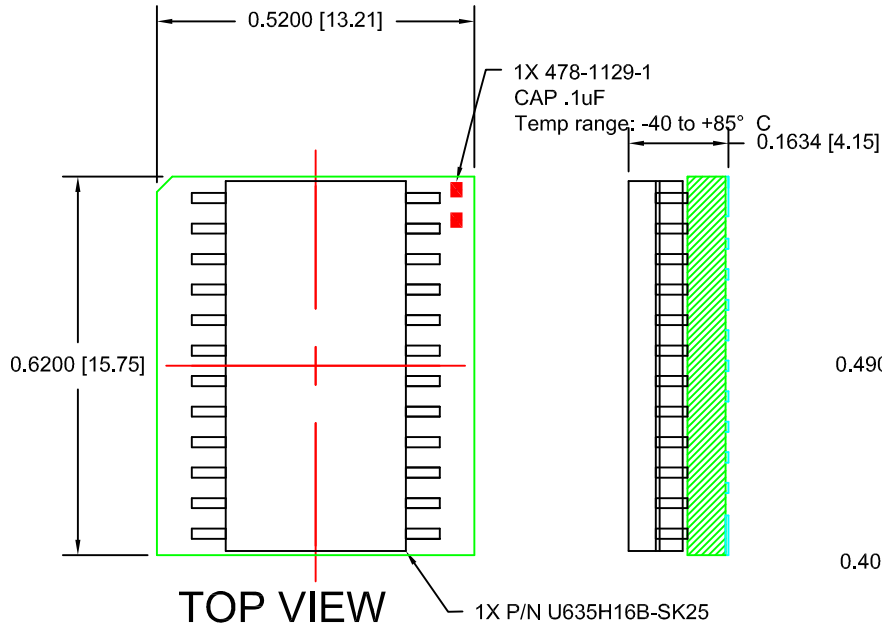

CONTRACT NO.		 ADAPTERS-PLUS WWW.ADAPT-PLUS.COM, PH 209-839-0200		
APPROVALS:		CONVERTER ADAPTER, 24 SOP TO 32 PLCC CUSTOM FOR ST AERO		
DRAWN BY: ANDREW MONTOYA				
CHECKED: MIKE OIDEM	SIZE A	FSCM NO.	DWG NO. CA24SOP32PLCC-ST	REV B
ISSUED: ANDREW MONTOYA	SCALE: 4:1	DATE : 04/11/05	SHEET: 1 OF 1	