
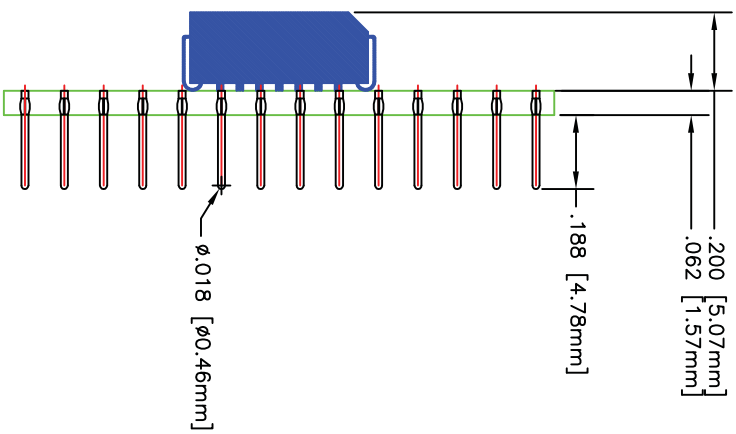


PIN SPECIFICATIONS:
 MATERIAL: BRASS ALLOY 360 1/2 HARD PER QQ-B-626
 FINISH: 10U GOLD OVER 100U NICKEL MIL-G-45204
 ELECTRICAL: CURRENT: 1 AMP RESISTANCE: <25 M OHM

MATERIAL SPECIFICATIONS:
 STANDARD MATERIAL: GLASS EPOXY FR-4, IPC-4101/24,
 MIL-S-13949/04-GF/GFGL: 94V-0, CONTINUOUS USE TEMP 150C,
 HEAT DEFLECTION TEMP @264 PSI 175C

REVISIONS		DESCRIPTION	DATE	APPROVED
ZONE	REV	NEW RELEASE	03/11/04	
---	A			

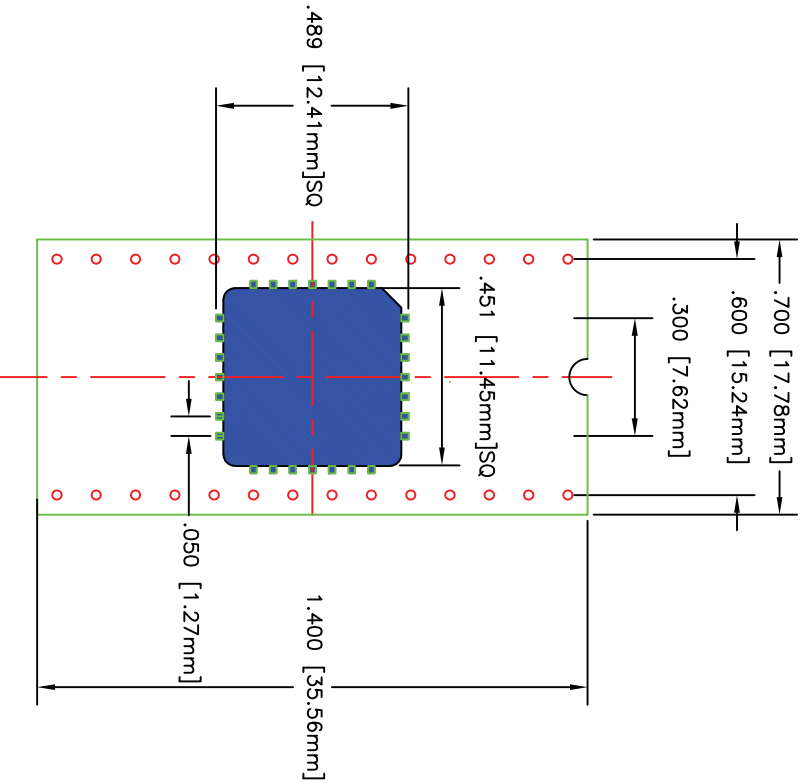


UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE :
 FRACTIONS DECIMALS ANGLES
 +/- .1 .XX = +/- .01 +/- .1°
 .XXX = +/- .005

CONTRACT NO. APPROVALS:
 DRAWN BY: ANDREW MONTOYA

FINISH: SEE NOTES CHECKED: MIKE OIDEM

DO NOT SCALE DRAWING ISSUED: ANDREW MONTOYA



ADAPTERS-PLUS
 WWW.ADAPT-PLUS.COM, PH 209-839-0200

28 PLCC TO 28 PIN .6 WIDE DIP 1-1

SCALE: 2:1	DATE : 03/11/04	SHEET: 1 OF 1
SIZE A	FSCM NO.	DWG NO. CA28PLCC-DIP.6
REV A		