
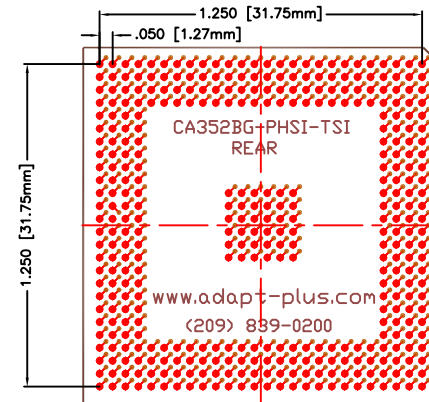



PIN SPECIFICATIONS:
 MATERIAL: BRASS ALLOY 360 1/2 HARD PER QQ-B-828
 FINISH: 10u GOLD OVER 100u NICKEL MIL-C-45204
 ELECTRICAL PERFORMANCE TESTS IAW MIL-STD-202 OR 1344 METHODS:
 MAX VOLTAGE: 50 VAC/60 VDC
 MAX CURRENT: 1 AMP
 CONTACT RES: 010 MAX .01 AMPS/5VDC
 INSULATION RESISTANCE, @500 VDC: 5000 MEGOHMS MIN.
 CAPACITANCE: 1pF MAX
 SELF INDUCTANCE: 2nH MAX.

MATERIAL SPECIFICATIONS:
 STANDARD MATERIAL:
 GLASS EPOXY FR-4, IPC-4101/24,
 MIL-S-13949/04-GF/300UL
 94V-0, CONTINUOUS USE TEMP 150C,
 HEAT DEFLECTION TEMP(@264 PSI)175C
 SOLDER BALL: 0306 EUTECTIC 4%
 12.45-13. MELTING TEMPERATURE
 183°C

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
---	A	NEW RELEASE	12/19/06	

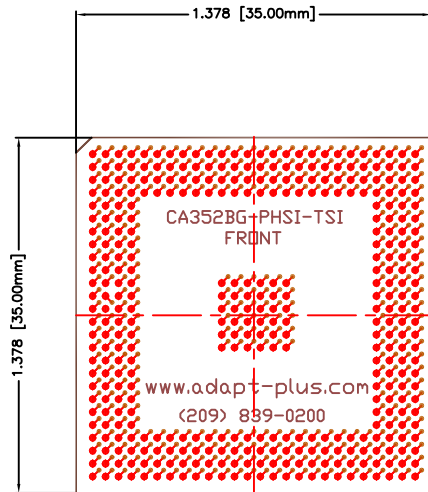

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS PROPERTY OF ADAPTERS-PLUS INC. IT MAY NOT BE ISSUED FOR MANUFACTURE OR SALE, REPRODUCED, TRANSMITTED OR OTHERWISE DISCLOSED TO ANY OTHER PARTY WITHOUT THE EXPRESSED WRITTEN CONSENT FROM ADAPTERS-PLUS INC.



ADAPTERS-PLUS
 WWW.ADAPT-PLUS.COM, PH 209-839-0200

CUSTOM BGA INTERPOSER CONVERTS
 352 BGA TO 352 BGA FOR LUCENT PHSI-TSI

DRAWN BY: ANDREW MONTOYA	SIZE	FSCM NO.	DWG NO. CA352BG-PHSI-TSI	REV A
CHECKED: MIKE OIDEM	SCALE 2:1	DATE 12/19/06	SHEET	