

PA28-28(Z) Data Sheet

28 pin PLCC socket/28 pin DIP 0.6" plug


Supported Device/Footprints

This adapter allows programming of several PLCC and CLCC devices in their DIP footprint.


Following is a partial list:

Mfgr	Device	Package	Device	Footprint Plug
Several	87C752	PLCC	87C752	28 Pin DIP
"	EPB2002	"	EPB2002	"
"	CY7330	"	CY7330	"
"	CY7331	"	CY7331	"
"	CY7332	"	CY7332	"
"	CY7C361	"	CY7C361	"
"	CY7C344	"	CY7C344	"
"	29PL141	"	29PL141	"
"	PLS 100	"	PLS 100	"
"	PLS 101	"	PLS 101	"
"	PLS 103	"	PLS 103	"
"	PLS 104	"	PLS 104	"
"	PLS 105	"	PLS 105	"
"	PLS 105/A	"	PLS 105/A	"
"	PLUS405	"	PLUS405	"

Adapter Dimensions

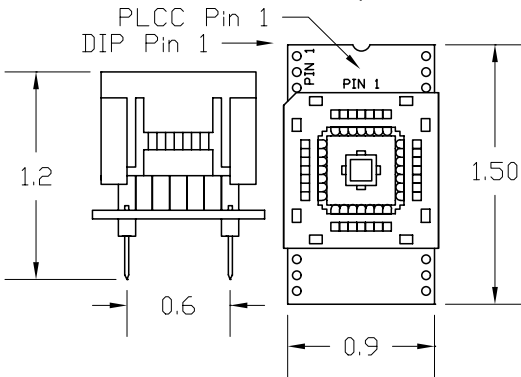

PA28-28

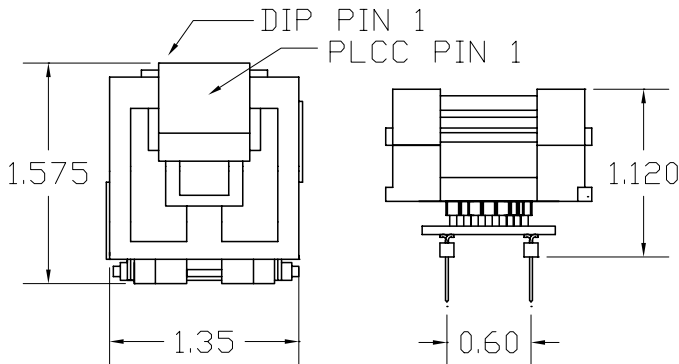

PA28-28Z

Adapter Construction

The adapter is made up of 2 sub-assemblies. They assemble via connectors making the adapter modular. This way the sub-assemblies can be replaced when they wear out.

When disassembling the adapter take care not to bend the pins. When reassembling the adapter note the pin 1 indicators to align the parts correctly.

Test Socket

PLCC Auto-Eject test socket:

Yamaichi Part #: IC120-0284-508

LSC Part #: 28-508

PLCC Lidded ZIF socket:

Yamaichi Part #: IC51-0284-399

LSC Part #: 28-399

PA28-28(Z)

Connects the PLCC pinout to the DIP footprint.

Adapter Wiring

The following chart shows the connections from the PLCC device to the adapter's DIP plug.

DEVICE	PLUG
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28